

6.003: Signals and Systems

DT Fourier Representations

November 10, 2011

Mid-term Examination #3

Wednesday, November 16, 7:30-9:30pm,

No recitations on the day of the exam.

Coverage: Lectures 1–18
 Recitations 1–16
 Homeworks 1–10

Homework 10 will not be collected or graded.


Solutions will be posted.

Closed book: 3 pages of notes ($8\frac{1}{2}$)

Conflict? Contact before Friday, Nov. 11, 5pm.

Review: DT Frequency Response

The frequency response of a DT LTI system is the value of the system function evaluated on the unit circle.





$$H(e^{j\Omega}) = H(z)|_{z=e^{j\Omega}}$$

Comparison of CT and DT Frequency Responses


CT frequency response: $H(s)$ on the imaginary axis, i.e., $s = j\omega$.

DT frequency response: $H(z)$ on the unit circle, i.e., $z = e^{j\Omega}$.

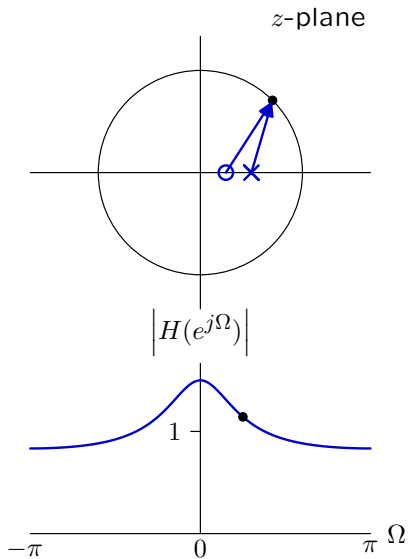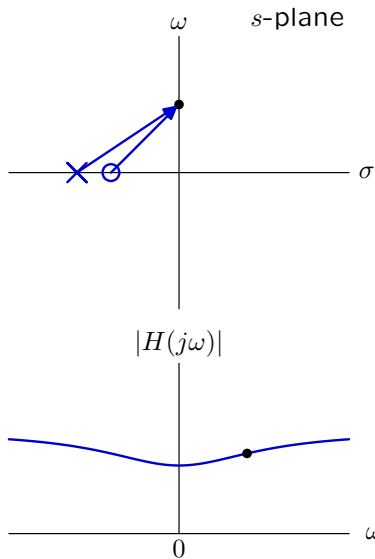

Check Yourself

A system $H(z) = \frac{1 - az}{z - a}$ has the following pole-zero diagram.

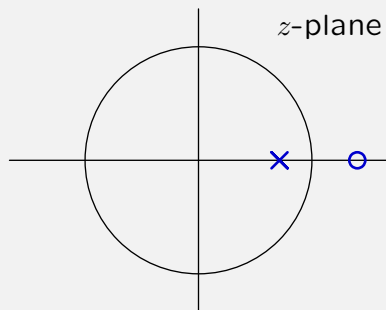

Classify this system as one of the following filter types.

- | | |
|--------------|----------------------|
| 1. high pass | 2. low pass |
| 3. band pass | 4. all pass |
| 5. band stop | 0. none of the above |

Check Yourself

Classify the system ...

$$H(z) = \frac{1 - az}{z - a}$$

Find the frequency response:


$$H(e^{j\Omega}) = \frac{1 - ae^{j\Omega}}{e^{j\Omega} - a} = e^{j\Omega} \frac{e^{-j\Omega} - a}{e^{j\Omega} - a} \quad \leftarrow \text{complex}$$
$$\quad \quad \quad \quad \quad \quad \quad \quad \quad \quad \quad \quad \quad \quad \quad \quad \quad \quad \quad \leftarrow \text{conjugates}$$

Because complex conjugates have equal magnitudes, $|H(e^{j\Omega})| = 1$.

→ all-pass filter

Check Yourself

A system $H(z) = \frac{1 - az}{z - a}$ has the following pole-zero diagram.


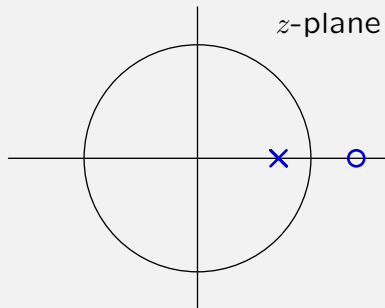


Classify this system as one of the following filter types. 4




1. high pass
2. low pass
3. band pass
4. **all pass**
5. band stop
0. none of the above

Effects of Phase




$$x[n] \rightarrow \boxed{H(z) = \frac{1 - az}{z - a}} \rightarrow y[n]$$

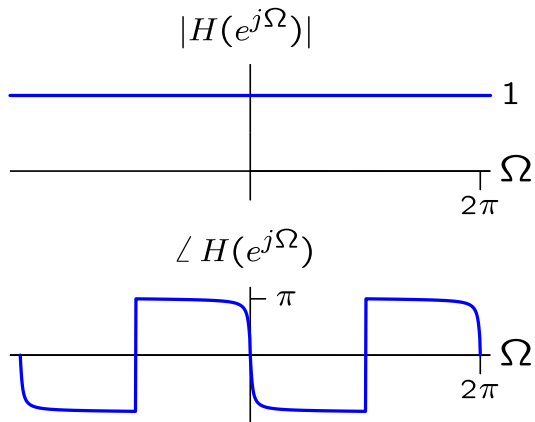

Effects of Phase

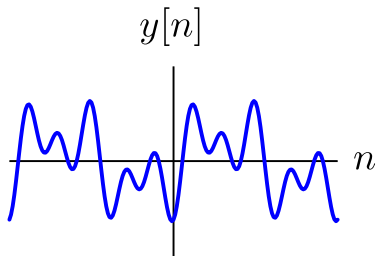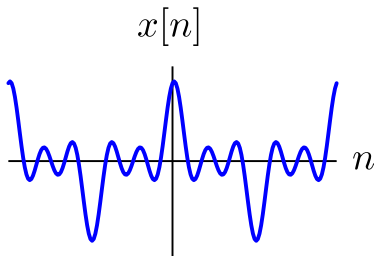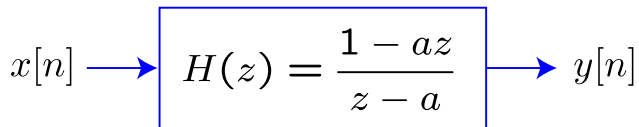

Effects of Phase

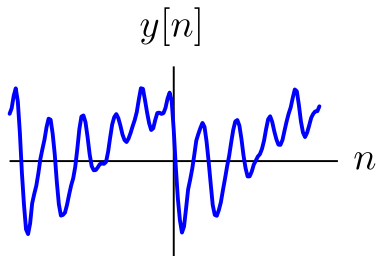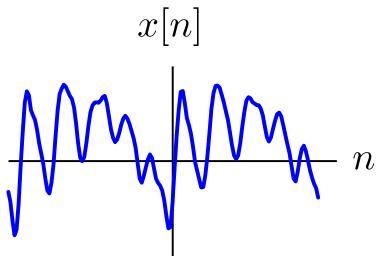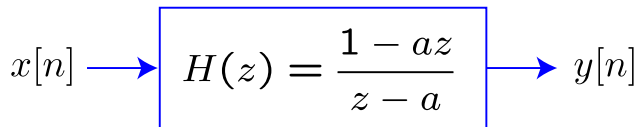


<http://public.research.att.com/~ttsweb/tts/demo.php>


Effects of Phase

$$x[n] \longrightarrow \boxed{H(z) = \frac{1 - az}{z - a}} \longrightarrow y[n]$$

$x[n]$

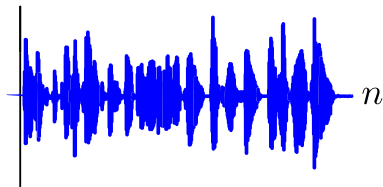

$y[n]$

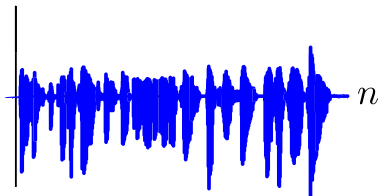


artificial speech synthesized by Robert Donovan


Effects of Phase

$$x[n] \longrightarrow \boxed{???} \longrightarrow y[n] = x[-n]$$

$x[n]$

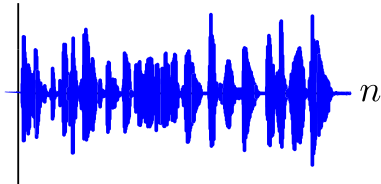

$x[-n]$

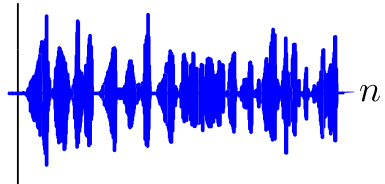


artificial speech synthesized by Robert Donovan


Effects of Phase

$$x[n] \longrightarrow \boxed{???} \longrightarrow y[n] = x[-n]$$

$x[n]$

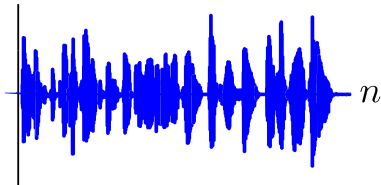


$x[-n]$

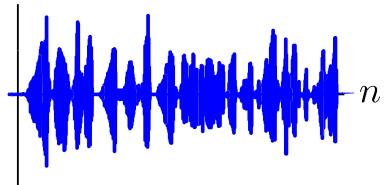


How are the phases of X and Y related?

Effects of Phase

$x[n]$

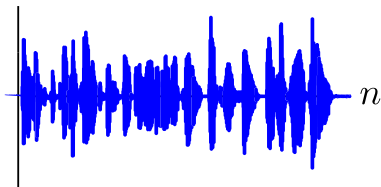

$x[-n]$

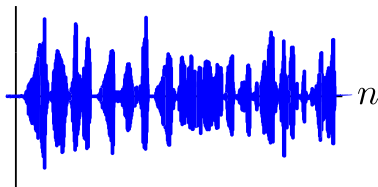

How are the phases of X and Y related?

$$a_k = \sum_n x[n] e^{-jk\Omega_0 n}$$

$$b_k = \sum_n x[-n] e^{-jk\Omega_0 n} = \sum_m x[m] e^{jk\Omega_0 m} = a_{-k}$$

Flipping $x[n]$ about $n = 0$ flips a_k about $k = 0$.

Because $x[n]$ is real-valued, a_k is conjugate symmetric: $a_{-k} = a_k^*$.

$$b_k = a_{-k} = a_k^* = |a_k| e^{-j\angle a_k}$$

The angles are negated at all frequencies.

Review: Periodicity

DT frequency responses are periodic functions of Ω , with period 2π .

If $\Omega_2 = \Omega_1 + 2\pi k$ where k is an integer then

$$H(e^{j\Omega_2}) = H(e^{j(\Omega_1+2\pi k)}) = H(e^{j\Omega_1}e^{j2\pi k}) = H(e^{j\Omega_1})$$

The periodicity of $H(e^{j\Omega})$ results because $H(e^{j\Omega})$ is a function of $e^{j\Omega}$, which is itself periodic in Ω . Thus DT complex exponentials have many “aliases.”

$$e^{j\Omega_2} = e^{j(\Omega_1+2\pi k)} = e^{j\Omega_1}e^{j2\pi k} = e^{j\Omega_1}$$

Because of this aliasing, there is a “highest” DT frequency: $\Omega = \pi$.

Review: Periodic Sinusoids


There are (only) N distinct complex exponentials with period N .
(There were an infinite number in CT!)

If $y[n] = e^{j\Omega n}$ is periodic in N then

$$y[n] = e^{j\Omega n} = y[n + N] = e^{j\Omega(n+N)} = e^{j\Omega n} e^{j\Omega N}$$

and $e^{j\Omega N}$ must be 1, and $e^{j\Omega}$ must be one of the N^{th} roots of 1.

Example: $N = 8$



Review: DT Fourier Series

DT Fourier series represent DT signals in terms of the amplitudes and phases of harmonic components.

DT Fourier Series

$$a_k = a_{k+N} = \frac{1}{N} \sum_{n=\langle N \rangle} x[n] e^{-jk\Omega_0 n} \quad ; \quad \Omega_0 = \frac{2\pi}{N} \quad (\text{"analysis" equation})$$

$$x[n] = x[n+N] = \sum_{k=\langle N \rangle} a_k e^{jk\Omega_0 n} \quad (\text{"synthesis" equation})$$

DT Fourier Series

DT Fourier series have simple matrix interpretations.

$$x[n] = x[n+4] = \sum_{k=\langle 4 \rangle} a_k e^{jk\Omega_0 n} = \sum_{k=\langle 4 \rangle} a_k e^{jk\frac{2\pi}{4}n} = \sum_{k=\langle 4 \rangle} a_k j^{kn}$$

$$\begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ x[3] \end{bmatrix} = \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & j & -1 & -j \\ 1 & -1 & 1 & -1 \\ 1 & -j & -1 & j \end{bmatrix} \begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix}$$

$$a_k = a_{k+4} = \frac{1}{4} \sum_{n=\langle 4 \rangle} x[n] e^{-jk\Omega_0 n} = \frac{1}{4} \sum_{n=\langle 4 \rangle} e^{-jk\frac{2\pi}{4}n} x[n] = \frac{1}{4} \sum_{n=\langle 4 \rangle} x[n] j^{-kn}$$

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \frac{1}{4} \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & -j & -1 & j \\ 1 & -1 & 1 & -1 \\ 1 & j & -1 & -j \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ x[3] \end{bmatrix}$$

These matrices are inverses of each other.

Scaling

DT Fourier series are important computational tools.

However, the DT Fourier series do not scale well with the length N .

$$a_k = a_{k+2} = \frac{1}{2} \sum_{n=\langle 2 \rangle} x[n] e^{-jk\Omega_0 n} = \frac{1}{2} \sum_{n=\langle 2 \rangle} e^{-jk\frac{2\pi}{2}n} = \frac{1}{2} \sum_{n=\langle 2 \rangle} x[n] (-1)^{-kn}$$

$$\begin{bmatrix} a_0 \\ a_1 \end{bmatrix} = \frac{1}{2} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \end{bmatrix}$$

$$a_k = a_{k+4} = \frac{1}{4} \sum_{n=\langle 4 \rangle} x[n] e^{-jk\Omega_0 n} = \frac{1}{4} \sum_{n=\langle 4 \rangle} e^{-jk\frac{2\pi}{4}n} = \frac{1}{4} \sum_{n=\langle 4 \rangle} x[n] j^{-kn}$$

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \frac{1}{4} \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & -j & -1 & j \\ 1 & -1 & 1 & -1 \\ 1 & j & -1 & -j \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ x[3] \end{bmatrix}$$

Number of multiples increases as N^2 .

Fast Fourier “Transform”

Exploit structure of Fourier series to simplify its calculation.

Divide FS of length $2N$ into two of length N (divide and conquer).

Matrix formulation of 8-point FS:

$$\begin{bmatrix} c_0 \\ c_1 \\ c_2 \\ c_3 \\ c_4 \\ c_5 \\ c_6 \\ c_7 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^1 & W_8^2 & W_8^3 & W_8^4 & W_8^5 & W_8^6 & W_8^7 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 & W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^3 & W_8^6 & W_8^1 & W_8^4 & W_8^7 & W_8^2 & W_8^5 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 & W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^5 & W_8^2 & W_8^7 & W_8^4 & W_8^1 & W_8^6 & W_8^3 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 & W_8^0 & W_8^6 & W_8^4 & W_8^2 \\ W_8^0 & W_8^7 & W_8^6 & W_8^5 & W_8^4 & W_8^3 & W_8^2 & W_8^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ x[3] \\ x[4] \\ x[5] \\ x[6] \\ x[7] \end{bmatrix}$$

where $W_N = e^{-j\frac{2\pi}{N}}$

$8 \times 8 = 64$ multiplications

Divide into two 4-point series (divide and conquer).

Even-numbered entries in $x[n]$:

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

Odd-numbered entries in $x[n]$:

$$\begin{bmatrix} b_0 \\ b_1 \\ b_2 \\ b_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

Sum of multiplications = $2 \times (4 \times 4) = 32$: fewer than the previous 64.

Break the original 8-point DTFS coefficients c_k into two parts:

$$c_k = d_k + e_k$$

where d_k comes from the even-numbered $x[n]$ (e.g., a_k) and e_k comes from the odd-numbered $x[n]$ (e.g., b_k)

The 4-point DTFS coefficients a_k of the even-numbered $x[n]$

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

contribute to the 8-point DTFS coefficients d_k :

$$\begin{bmatrix} d_0 \\ d_1 \\ d_2 \\ d_3 \\ d_4 \\ d_5 \\ d_6 \\ d_7 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^1 & W_8^2 & W_8^3 & W_8^4 & W_8^5 & W_8^6 & W_8^7 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 & W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^3 & W_8^6 & W_8^1 & W_8^4 & W_8^7 & W_8^2 & W_8^5 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 & W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^5 & W_8^2 & W_8^7 & W_8^4 & W_8^1 & W_8^6 & W_8^3 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 & W_8^0 & W_8^6 & W_8^4 & W_8^2 \\ W_8^0 & W_8^7 & W_8^6 & W_8^5 & W_8^4 & W_8^3 & W_8^2 & W_8^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ x[3] \\ x[4] \\ x[5] \\ x[6] \\ x[7] \end{bmatrix}$$

The 4-point DTFS coefficients a_k of the even-numbered $x[n]$

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

contribute to the 8-point DTFS coefficients d_k :

$$\begin{bmatrix} d_0 \\ d_1 \\ d_2 \\ d_3 \\ d_4 \\ d_5 \\ d_6 \\ d_7 \end{bmatrix} = \begin{bmatrix} W_8^0 & & W_8^0 & & W_8^0 & & W_8^0 & \\ & W_8^0 & & W_8^2 & & W_8^4 & & W_8^6 \\ W_8^0 & & W_8^4 & & W_8^0 & & W_8^4 & \\ & W_8^0 & & W_8^6 & & W_8^4 & & W_8^2 \\ W_8^0 & & W_8^0 & & W_8^0 & & W_8^0 & \\ & W_8^0 & & W_8^2 & & W_8^4 & & W_8^6 \\ W_8^0 & & W_8^4 & & W_8^0 & & W_8^4 & \\ & W_8^0 & & W_8^6 & & W_8^4 & & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

The 4-point DTFS coefficients a_k of the even-numbered $x[n]$

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

contribute to the 8-point DTFS coefficients d_k :

$$\begin{bmatrix} d_0 \\ d_1 \\ d_2 \\ d_3 \\ d_4 \\ d_5 \\ d_6 \\ d_7 \end{bmatrix} = \begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \\ a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \\ W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

The 4-point DTFS coefficients a_k of the even-numbered $x[n]$

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

contribute to the 8-point DTFS coefficients d_k :

$$\begin{bmatrix} d_0 \\ d_1 \\ d_2 \\ d_3 \\ d_4 \\ d_5 \\ d_6 \\ d_7 \end{bmatrix} = \begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \\ a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \\ W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

The e_k components result from the odd-number entries in $x[n]$.

$$\begin{bmatrix} b_0 \\ b_1 \\ b_2 \\ b_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

$$\begin{bmatrix} e_0 \\ e_1 \\ e_2 \\ e_3 \\ e_4 \\ e_5 \\ e_6 \\ e_7 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^1 & W_8^2 & W_8^3 & W_8^4 & W_8^5 & W_8^6 & W_8^7 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 & W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^3 & W_8^6 & W_8^1 & W_8^4 & W_8^7 & W_8^2 & W_8^5 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 & W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^5 & W_8^2 & W_8^7 & W_8^4 & W_8^1 & W_8^6 & W_8^3 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 & W_8^0 & W_8^6 & W_8^4 & W_8^2 \\ W_8^0 & W_8^7 & W_8^6 & W_8^5 & W_8^4 & W_8^3 & W_8^2 & W_8^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ x[3] \\ x[4] \\ x[5] \\ x[6] \\ x[7] \end{bmatrix}$$

The e_k components result from the odd-number entries in $x[n]$.

$$\begin{bmatrix} b_0 \\ b_1 \\ b_2 \\ b_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

$$\begin{bmatrix} e_0 \\ e_1 \\ e_2 \\ e_3 \\ e_4 \\ e_5 \\ e_6 \\ e_7 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^1 & W_8^3 & W_8^5 & W_8^7 \\ W_8^2 & W_8^6 & W_8^2 & W_8^8 \\ W_8^3 & W_8^1 & W_8^7 & W_8^5 \\ W_8^4 & W_8^4 & W_8^4 & W_8^4 \\ W_8^5 & W_8^7 & W_8^1 & W_8^3 \\ W_8^6 & W_8^2 & W_8^6 & W_8^2 \\ W_8^7 & W_8^5 & W_8^3 & W_8^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

The e_k components result from the odd-number entries in $x[n]$.

$$\begin{bmatrix} b_0 \\ b_1 \\ b_2 \\ b_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

$$\begin{bmatrix} e_0 \\ e_1 \\ e_2 \\ e_3 \\ e_4 \\ e_5 \\ e_6 \\ e_7 \end{bmatrix} = \begin{bmatrix} W_8^0 b_0 \\ W_8^1 b_1 \\ W_8^2 b_2 \\ W_8^3 b_3 \\ W_8^4 b_0 \\ W_8^5 b_1 \\ W_8^6 b_2 \\ W_8^7 b_3 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^1 & W_8^3 & W_8^5 & W_8^7 \\ W_8^2 & W_8^6 & W_8^2 & W_8^6 \\ W_8^3 & W_8^1 & W_8^7 & W_8^5 \\ W_8^4 & W_8^4 & W_8^4 & W_8^4 \\ W_8^5 & W_8^7 & W_8^1 & W_8^3 \\ W_8^6 & W_8^2 & W_8^6 & W_8^2 \\ W_8^7 & W_8^5 & W_8^3 & W_8^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

FFT

The e_k components result from the odd-number entries in $x[n]$.

$$\begin{bmatrix} b_0 \\ b_1 \\ b_2 \\ b_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

$$\begin{bmatrix} e_0 \\ e_1 \\ e_2 \\ e_3 \\ e_4 \\ e_5 \\ e_6 \\ e_7 \end{bmatrix} = \begin{bmatrix} W_8^0 b_0 \\ W_8^1 b_1 \\ W_8^2 b_2 \\ W_8^3 b_3 \\ W_8^4 b_0 \\ W_8^5 b_1 \\ W_8^6 b_2 \\ W_8^7 b_3 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^1 & W_8^3 & W_8^5 & W_8^7 \\ W_8^2 & W_8^6 & W_8^2 & W_8^6 \\ W_8^3 & W_8^1 & W_8^7 & W_8^5 \\ W_8^4 & W_8^4 & W_8^4 & W_8^4 \\ W_8^5 & W_8^7 & W_8^1 & W_8^3 \\ W_8^6 & W_8^2 & W_8^6 & W_8^2 \\ W_8^7 & W_8^5 & W_8^3 & W_8^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

Combine a_k and b_k to get c_k .

$$\begin{bmatrix} c_0 \\ c_1 \\ c_2 \\ c_3 \\ c_4 \\ c_5 \\ c_6 \\ c_7 \end{bmatrix} = \begin{bmatrix} d_0 + e_0 \\ d_1 + e_1 \\ d_2 + e_2 \\ d_3 + e_3 \\ d_4 + e_4 \\ d_5 + e_5 \\ d_6 + e_6 \\ d_7 + e_7 \end{bmatrix} = \begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \\ a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} + \begin{bmatrix} W_8^0 b_0 \\ W_8^1 b_1 \\ W_8^2 b_2 \\ W_8^3 b_3 \\ W_8^4 b_0 \\ W_8^5 b_1 \\ W_8^6 b_2 \\ W_8^7 b_3 \end{bmatrix}$$

FFT procedure:

- compute a_k and b_k : $2 \times (4 \times 4) = 32$ multiplies
- combine $c_k = a_k + W_8^k b_k$: 8 multiplies
- total 40 multiplies: fewer than the original $8 \times 8 = 64$ multiplies

Scaling of FFT algorithm

How does the new algorithm scale?

Let $M(N)$ = number of multiplies to perform an N point FFT.

$$M(1) = 0$$

$$M(2) = 2M(1) + 2 = 2$$

$$M(4) = 2M(2) + 4 = 2 \times 4$$

$$M(8) = 2M(4) + 8 = 3 \times 8$$

$$M(16) = 2M(8) + 16 = 4 \times 16$$

$$M(32) = 2M(16) + 32 = 5 \times 32$$

$$M(64) = 2M(32) + 64 = 6 \times 64$$

$$M(128) = 2M(64) + 128 = 7 \times 128$$

...


$$M(N) = (\log_2 N) \times N$$

Significantly smaller than N^2 for N large.


Fourier Transform: Generalize to Aperiodic Signals

An aperiodic signal can be thought of as periodic with infinite period.

Let $x[n]$ represent an aperiodic signal DT signal.

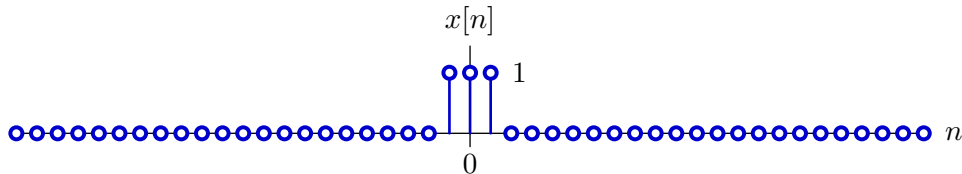


“Periodic extension”:
$$x_N[n] = \sum_{k=-\infty}^{\infty} x[n + kN]$$

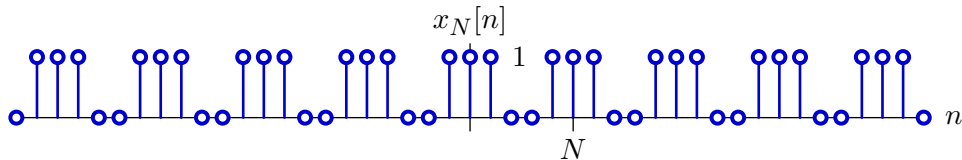


Then
$$x[n] = \lim_{N \rightarrow \infty} x_N[n].$$

Fourier Transform

Represent $x_N[n]$ by its Fourier series.

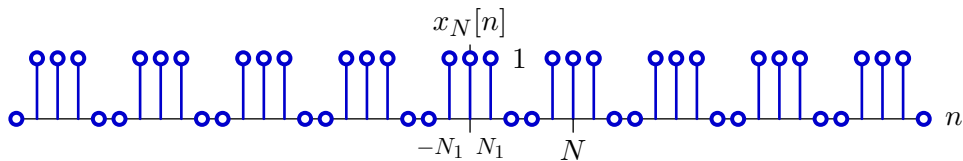


$$a_k = \frac{1}{N} \sum_N x_N[n] e^{-j\frac{2\pi}{N}kn} = \frac{1}{N} \sum_{n=-N_1}^{N_1} e^{-j\frac{2\pi}{N}kn} = \frac{1}{N} \frac{\sin\left(N_1 + \frac{1}{2}\right)\Omega}{\sin\frac{1}{2}\Omega}$$

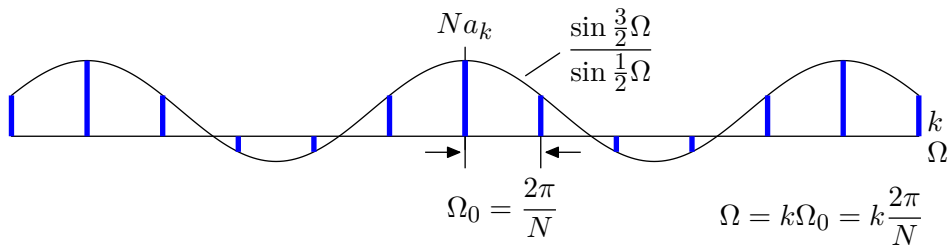


Fourier Transform

Doubling period doubles # of harmonics in given frequency interval.

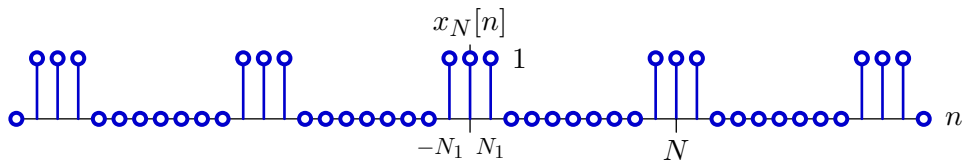


$$a_k = \frac{1}{N} \sum_N x_N[n] e^{-j\frac{2\pi}{N}kn} = \frac{1}{N} \sum_{n=-N_1}^{N_1} e^{-j\frac{2\pi}{N}kn} = \frac{1}{N} \frac{\sin\left(N_1 + \frac{1}{2}\right)\Omega}{\sin\frac{1}{2}\Omega}$$

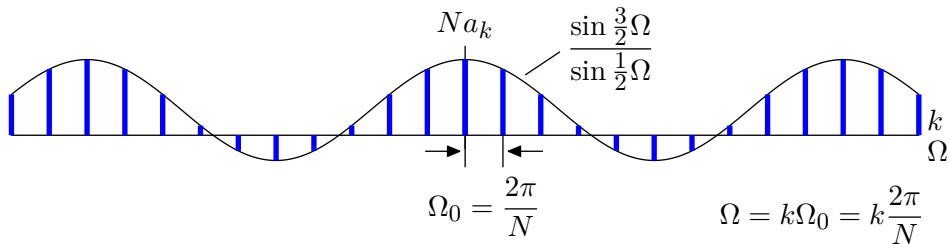


Fourier Transform

As $N \rightarrow \infty$, discrete harmonic amplitudes \rightarrow a continuum $E(\Omega)$.

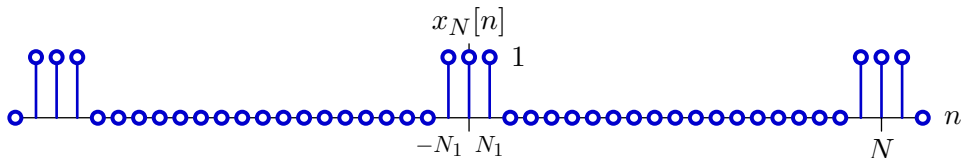



$$a_k = \frac{1}{N} \sum_N x_N[n] e^{-j\frac{2\pi}{N}kn} = \frac{1}{N} \sum_{n=-N_1}^{N_1} e^{-j\frac{2\pi}{N}kn} = \frac{1}{N} \frac{\sin\left(N_1 + \frac{1}{2}\right)\Omega}{\sin\frac{1}{2}\Omega}$$

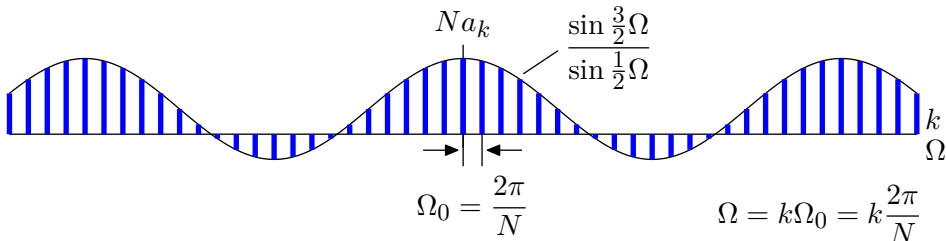

$$Na_k = \sum_{n=\langle N \rangle} x[n] e^{-j\frac{2\pi}{N}kn} = \sum_{n=\langle N \rangle} x[n] e^{-j\Omega n} = E(\Omega)$$

Fourier Transform

As $N \rightarrow \infty$, synthesis sum \rightarrow integral.

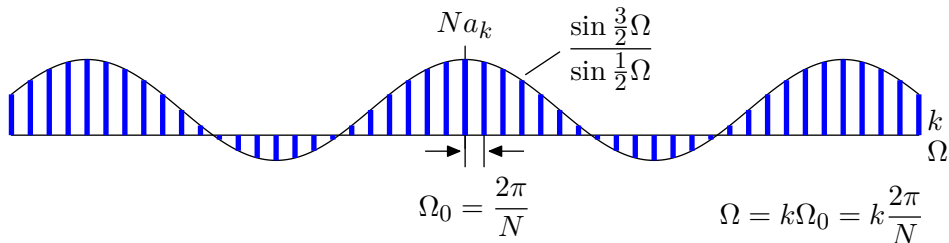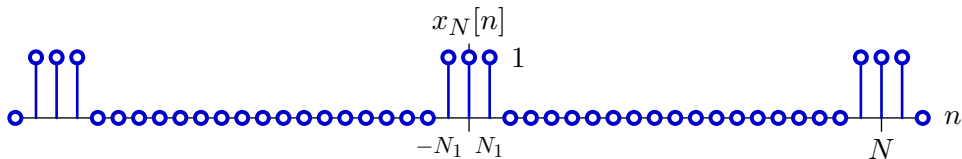

$$Na_k = \sum_{n=\langle N \rangle} x[n]e^{-j\frac{2\pi}{N}kn} = \sum_{n=\langle N \rangle} x[n]e^{-j\Omega n} = E(\Omega)$$

$$x[n] = \sum_{k=\langle N \rangle} \underbrace{\frac{1}{N}E(\Omega)}_{a_k} e^{j\frac{2\pi}{N}kn} = \sum_{k=\langle N \rangle} \frac{\Omega_0}{2\pi} E(\Omega) e^{j\Omega n} \rightarrow \frac{1}{2\pi} \int_{2\pi} E(\Omega) e^{j\Omega n} d\Omega$$

Fourier Transform

Replacing $E(\Omega)$ by $X(e^{j\Omega})$ yields the DT Fourier transform relations.

$$X(e^{j\Omega}) = \sum_{n=-\infty}^{\infty} x[n]e^{-j\Omega n} \quad (\text{"analysis" equation})$$

$$x[n] = \frac{1}{2\pi} \int_{2\pi} X(e^{j\Omega})e^{j\Omega n} d\Omega \quad (\text{"synthesis" equation})$$

Relation between Fourier and Z Transforms

If the Z transform of a signal exists and if the ROC includes the unit circle, then the Fourier transform is equal to the Z transform evaluated on the unit circle.

Z transform:

$$X(z) = \sum_{n=-\infty}^{\infty} x[n]z^{-n}$$

DT Fourier transform:

$$X(e^{j\Omega}) = \sum_{n=-\infty}^{\infty} x[n]e^{-j\Omega n} = H(z) \Big|_{z=e^{j\Omega}}$$

Relation between Fourier and Z Transforms


Fourier transform “inherits” properties of Z transform.

Property	$x[n]$	$X(z)$	$X(e^{j\Omega})$
Linearity	$ax_1[n] + bx_2[n]$	$aX_1(s) + bX_2(s)$	$aX_1(e^{j\Omega}) + bX_2(e^{j\Omega})$
Time shift	$x[n - n_0]$	$z^{-n_0}X(z)$	$e^{-j\Omega n_0}X(e^{j\Omega})$
Multiply by n	$nx[n]$	$-z\frac{d}{dz}X(z)$	$j\frac{d}{d\Omega}X(e^{j\Omega})$
Convolution	$(x_1 * x_2)[n]$	$X_1(z) \times X_2(z)$	$X_1(e^{j\Omega}) \times X_2(e^{j\Omega})$


DT Fourier Series of Images




Magnitude




Angle



DT Fourier Series of Images

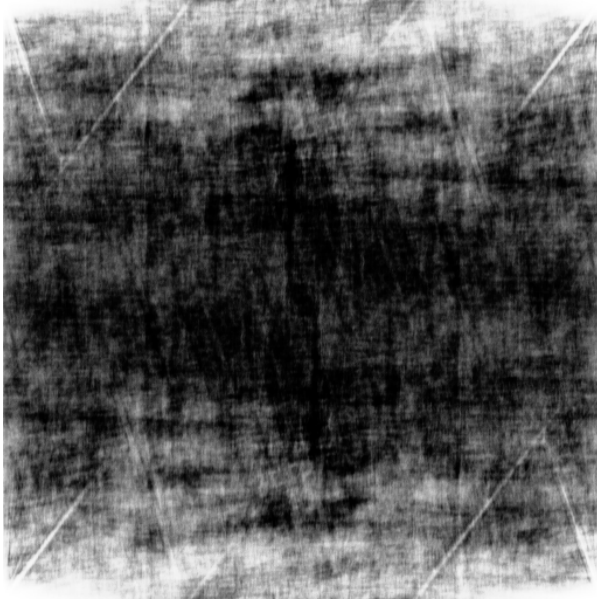


Magnitude



Uniform Angle




DT Fourier Series of Images

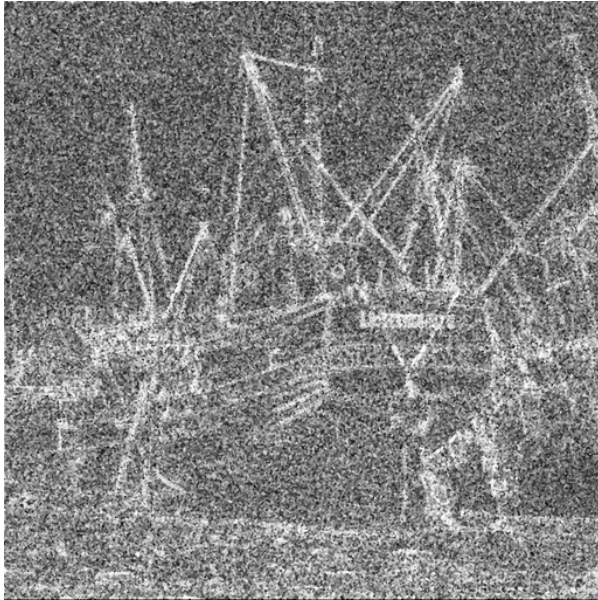


Uniform
Magnitude




Angle




DT Fourier Series of Images

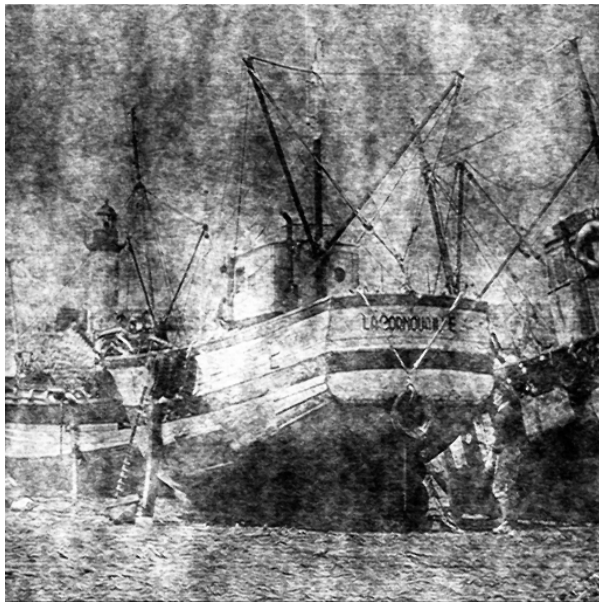


Different
Magnitude




Angle




DT Fourier Series of Images

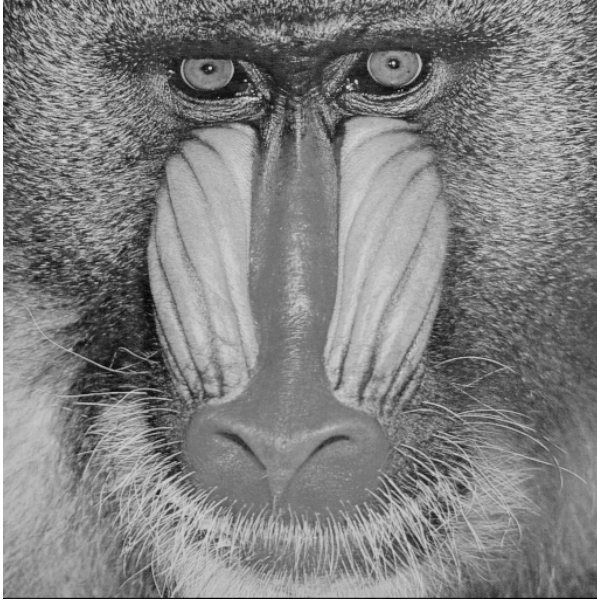

Magnitude




Angle




DT Fourier Series of Images




Magnitude




Angle




DT Fourier Series of Images

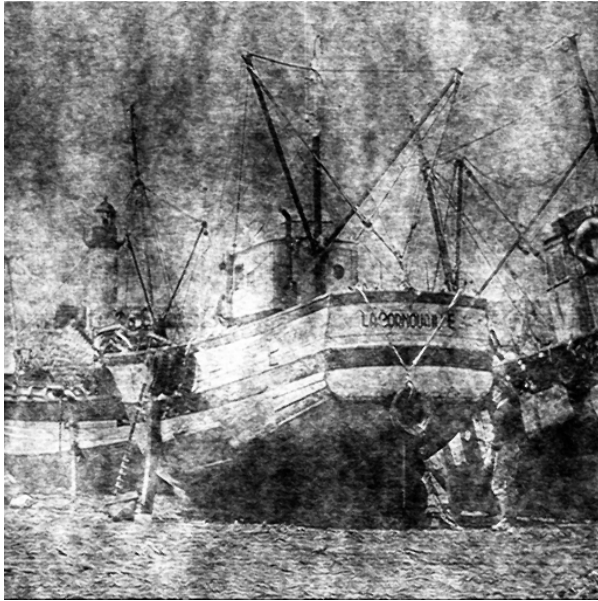

Different
Magnitude



Angle



Fourier Representations: Summary

Thinking about signals by their frequency content and systems as filters has a large number of practical applications.

MIT OpenCourseWare
<http://ocw.mit.edu>

6.003 Signals and Systems

Fall 2011

For information about citing these materials or our Terms of Use, visit: <http://ocw.mit.edu/terms>.